

**A
D
D
E
N
D
A**

**National Electronic Data Interchange
Transaction Set Implementation Guide**

**Payroll Deducted
and Other Group
Premium Payment
For Insurance
Products**

820

ASC X12N 820 (004010X061A1)

October 2001 • NPRM Draft

Contact **Washington Publishing Company** for more Information.

1.800.972.4334

www.wpc-edi.com

© 2001 WPC

Copyright for the members of ASC X12N by Washington Publishing Company.

Permission is hereby granted to any organization to copy and distribute this material internally as long as this copyright statement is included, the contents are not changed, and the copies are not sold.

Table of Contents

| | |
|--------------------------------|----------|
| X061 Introduction | 5 |
| Modified pages | 7 |

1 Introduction to Modified Pages

This document is addenda to the X12N Payroll Deducted and Other Group Premium Payment for Insurance Products Implementation Guide, originally published May 2000 as 004010X061. As a result of the post publication review process, items were identified that could be considered impediments to implementation. These items were passed to the X12N Health Care Work Group that created the original Implementation Guide for their review.

Appropriate modifications make up the contents of this Draft Addenda to the X12N 004010X061 Implementation Guide published in May 2000. Since this guide is named for use under HIPAA, this is a Draft Addenda that will go through a Notice of Proposed Rule Making (NPRM) process, just as the original Implementation Guide did, before becoming a final addenda to the guide published by X12N. Only the modifications noted in this Draft Addenda will be considered in the NPRM. Once this Draft addenda is approved for publication by X12N, the value used in GS08 will be "004010X061A1".

Each of the changes made to the 004010X061 Implementation Guide have been annotated with a note in red and a line pointing to the location of the change. For convenience, the affected 004010X061 Implementation Guide page number is noted at the bottom of the page. Please note that as a result of insertion or deletion of material each addenda page may not begin or end at the same place as the original referenced page. Because of this, addenda pages are not page for page replacements and the original pages should be retained.

Please note that changes in the addenda may have caused changes to the Data Element Dictionary and the Data Element Name Index (Appendix E in the original Implementation Guide), but are not identified in these draft addenda. Changes in the addenda may also have caused changes to the Examples and the EDI Transmission Examples (Section 4 in the original Implementation Guide), but are not identified in these draft addenda.

1.1 Overall Change Summary

Appendix A sub-section A.1.3.1.2 limits the size of dollar amounts used in the transaction if complying with HIPAA.

Data elements are assigned a unique reference number. Each data element has a name, description, type, minimum length, and maximum length. For ID type data elements, this guide provides the applicable ASC X12 code values and their descriptions or references where the valid code list can be obtained.

Each data element is assigned a minimum and maximum length. The length of the data element value is the number of character positions used except as noted for numeric, decimal, and binary elements.

The data element types shown in matrix A4, Data Element Types, appear in this implementation guide.

| SYMBOL | TYPE |
|--------|------------|
| Nn | Numeric |
| R | Decimal |
| ID | Identifier |
| AN | String |
| DT | Date |
| TM | Time |
| B | Binary |

Matrix A4. Data Element Types

A.1.3.1.1

Numeric

A numeric data element is represented by one or more digits with an optional leading sign representing a value in the normal base of 10. The value of a numeric data element includes an implied decimal point. It is used when the position of the decimal point within the data is permanently fixed and is not to be transmitted with the data.

This set of guides denotes the number of implied decimal positions. The representation for this data element type is “Nn” where N indicates that it is numeric and n indicates the number of decimal positions to the right of the implied decimal point.

If n is 0, it need not appear in the specification; N is equivalent to N0. For negative values, the leading minus sign (-) is used. Absence of a sign indicates a positive value. The plus sign (+) should not be transmitted.

EXAMPLE

A transmitted value of 1234, when specified as numeric type N2, represents a value of 12.34.

Leading zeros should be suppressed unless necessary to satisfy a minimum length requirement. The length of a numeric type data element does not include the optional sign.

A.1.3.1.2

Decimal

A decimal data element may contain an explicit decimal point and is used for numeric values that have a varying number of decimal positions. This data element type is represented as “R.”

The decimal point always appears in the character stream if the decimal point is at any place other than the right end. If the value is an integer (decimal point at the right end) the decimal point should be omitted. For negative values, the leading minus sign (-) is used. Absence of a sign indicates a positive value. The plus sign (+) should not be transmitted.

Leading zeros should be suppressed unless necessary to satisfy a minimum length requirement. Trailing zeros following the decimal point should be suppressed unless necessary to indicate precision. The use of triad separators (for example, the commas in 1,000,000) is expressly prohibited. The length of a decimal type data element does not include the optional leading sign or decimal point.

EXAMPLE

A transmitted value of 12.34 represents a decimal value of 12.34.

New note

For implementation of this guide under the rules promulgated under the Health Insurance Portability and Accountability Act (HIPAA), decimal data elements in Data Element 782 (Monetary Amount) will be limited to a maximum length of 10 characters including reported or implied places for cents (implied value of 00 after the decimal point). Note the statement in the preceding paragraph that the decimal point and leading sign, if sent, are not part of the character count.

A.1.3.1.3 Identifier

An identifier data element always contains a value from a predefined list of codes that is maintained by the ASC X12 Committee or some other body recognized by the Committee. Trailing spaces should be suppressed unless they are necessary to satisfy a minimum length. An identifier is always left justified. The representation for this data element type is "ID."

A.1.3.1.4 String

A string data element is a sequence of any characters from the basic or extended character sets. The significant characters shall be left justified. Leading spaces, when they occur, are presumed to be significant characters. Trailing spaces should be suppressed unless they are necessary to satisfy a minimum length. The representation for this data element type is "AN."

A.1.3.1.5 Date

A date data element is used to express the standard date in either YYMMDD or CCYYMMDD format in which CC is the first two digits of the calendar year, YY is the last two digits of the calendar year, MM is the month (01 to 12), and DD is the day in the month (01 to 31). The representation for this data element type is "DT." Users of this guide should note that all dates within transactions are 8-character dates (millennium compliant) in the format CCYYMMDD. The only date data element that is in format YYMMDD is the Interchange Date data element in the ISA segment, and also used in the TA1 Interchange Acknowledgment, where the century can be readily interpolated because of the nature of an interchange header.

A.1.3.1.6 Time

A time data element is used to express the ISO standard time HHMMSSd..d format in which HH is the hour for a 24 hour clock (00 to 23), MM is the minute (00 to 59), SS is the second (00 to 59) and d..d is decimal seconds. The representation for this data element type is "TM." The length of the data element determines the format of the transmitted time.

EXAMPLE

Transmitted data elements of four characters denote HHMM. Transmitted data elements of six characters denote HHMMSS.

IMPLEMENTATION

FUNCTIONAL GROUP HEADER


Example: **GS*RA*SENDER CODE*RECEIVER
CODE*19940331*0802*1*X*004010X061A1~** ——— Example changed

STANDARD

GS Functional Group Header

Purpose: To indicate the beginning of a functional group and to provide control information

DIAGRAM

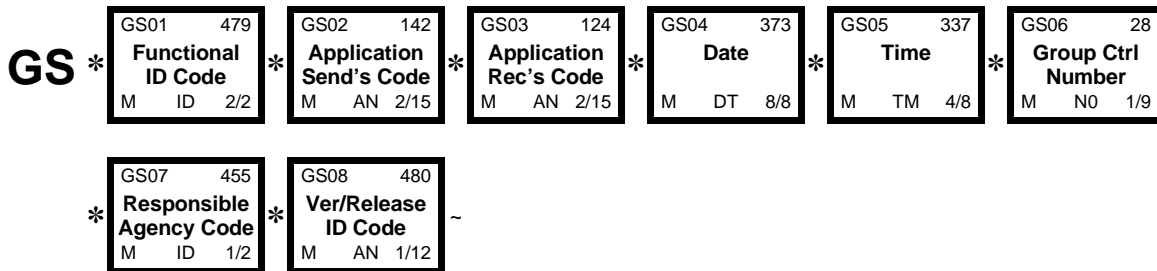

ELEMENT SUMMARY

| USAGE | REF. DES. | DATA ELEMENT | NAME | ATTRIBUTES |
|----------|-----------|--------------|--|--|
| REQUIRED | GS01 | 479 | Functional Identifier Code Code identifying a group of application related transaction sets | M ID 2/2 |
| | | | CODE | DEFINITION |
| | | | RA | Payment Order/Remittance Advice (820) |
| REQUIRED | GS02 | 142 | Application Sender's Code Code identifying party sending transmission; codes agreed to by trading partners | M AN 2/15 |
| | | | | Use this code to identify the unit sending the information. |
| REQUIRED | GS03 | 124 | Application Receiver's Code Code identifying party receiving transmission. Codes agreed to by trading partners | M AN 2/15 |
| | | | | Use this code to identify the unit receiving the information. |
| REQUIRED | GS04 | 373 | Date Date expressed as CCYYMMDD | M DT 8/8 |
| | | | SEMANTIC: GS04 is the group date. | |
| | | | | Use this date for the functional group creation date. |
| REQUIRED | GS05 | 337 | Time Time expressed in 24-hour clock time as follows: HHMM, or HHMMSS, or HHMMSSD, or HHMMSSDD, where H = hours (00-23), M = minutes (00-59), S = integer seconds (00-59) and DD = decimal seconds; decimal seconds are expressed as follows: D = tenths (0-9) and DD = hundredths (00-99) | M TM 4/8 |
| | | | SEMANTIC: GS05 is the group time. | |
| | | | | Use this time for the creation time. The recommended format is HHMM. |

| | | | | | | |
|-----------------|-------------|------------|--|---|-----------|-------------|
| REQUIRED | GS06 | 28 | Group Control Number Assigned number originated and maintained by the sender | M | NO | 1/9 |
| | | | SEMANTIC: The data interchange control number GS06 in this header must be identical to the same data element in the associated functional group trailer, GE02. | | | |
| REQUIRED | GS07 | 455 | Responsible Agency Code Code used in conjunction with Data Element 480 to identify the issuer of the standard | M | ID | 1/2 |
| | | | CODE | DEFINITION | | |
| | | | X | Accredited Standards Committee X12 | | |
| REQUIRED | GS08 | 480 | Version / Release / Industry Identifier Code Code indicating the version, release, subrelease, and industry identifier of the EDI standard being used, including the GS and GE segments; if code in DE455 in GS segment is X, then in DE 480 positions 1-3 are the version number; positions 4-6 are the release and subrelease, level of the version; and positions 7-12 are the industry or trade association identifiers (optionally assigned by user); if code in DE455 in GS segment is T, then other formats are allowed | M | AN | 1/12 |
| | | | CODE | DEFINITION | | |

New code value

004010X061A1 Draft Standards Approved for Publication by ASC X12 Procedures Review Board through October 1997, as published in this implementation guide.

This is a Draft Addenda to the X12N 004010X061 Implementation Guide published in May 2000 and not yet intended for implementation. Since the 004010X061 guide is named for use under HIPAA, this Draft Addenda must go through a Notice of Proposed Rule Making (NPRM) process, just as the original Implementation Guide did, before becoming a final addenda to the guide published by X12N. Only the modifications noted in this Draft Addenda will be considered in the NPRM. Once this Draft addenda is approved for publication by X12N, the value used in GS08 will be "004010X061A1".